

HL7040C

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger with Auto Start

Description

The HL7040C series of devices are highly integrated Li-Ion and Li-Pol linear chargers devices targeted at space limited portable applications. The devices operate from either a USB port or AC adapter. The high input voltage range with input overvoltage protection supports low-cost unregulated adapters.

The HL7040C has a single power output that charges the battery. A system load can be placed in parallel with the battery as long as the average system load does not keep the battery from charging fully during the 10 hour safety timer.

The battery is charged in three phases: conditioning, constant current and constant voltage. In all charge phases, an internal control loop monitors the IC junction temperature and reduces the charge current if an internal temperature threshold is exceeded.

The charger power stage and charge current sense functions are fully integrated. The charger function has high accuracy current and voltage regulation loops, charge status display, and charge termination. The pre-charge current and termination current threshold are programmed via an external resistor on the HL7040C.

The fast charge current value is also programmable via an external resistor.

HL7040C is available in a 10-pin DFN package.

Features

- CHARGING
 - 1% Charge Voltage Accuracy
 - 10% Charge Current Accuracy
 - Pin Selectable USB 100mA and 500mA Maximum Input Current Limit
 - Programmable Termination and Pre-charge Threshold
- PROTECTION
 - 30V Input Rating; with 6.6V or 7.1V Input Overvoltage Protection
 - Input Voltage Dynamic Power Management
 - 125°C Thermal Regulation; 150°C Thermal Shutdown Protection
 - OUT Short-Circuit Protection and ISET short detection
 - Operation over JEITA Range via Battery NTC-1/2 Fast Charge Current at Cold 4.06V at Hot
 - Programmable hot fault threshold
 - Fixed 10 Hour Safety Timer
- SYSTEM
 - Automatic Termination and Timer Disable Mode (TTDM) for Absent Battery Pack With Thermistor
 - Status Indication—Charging/Done
 - Available in Small 2mm×2mm DFN-10 Package
 - Integrated Auto Start Function for Production Line Testing

Applications

- Smartphones
- PDAs
- MP3 Players
- Low-Power Handheld Devices

Typical Application Diagram

$I_{OUT_FAST_CHG} = 540\text{mA}$; $I_{OUT_PRE_CHG} = 108\text{mA}$; $I_{OUT_TERM} = 54\text{mA}$

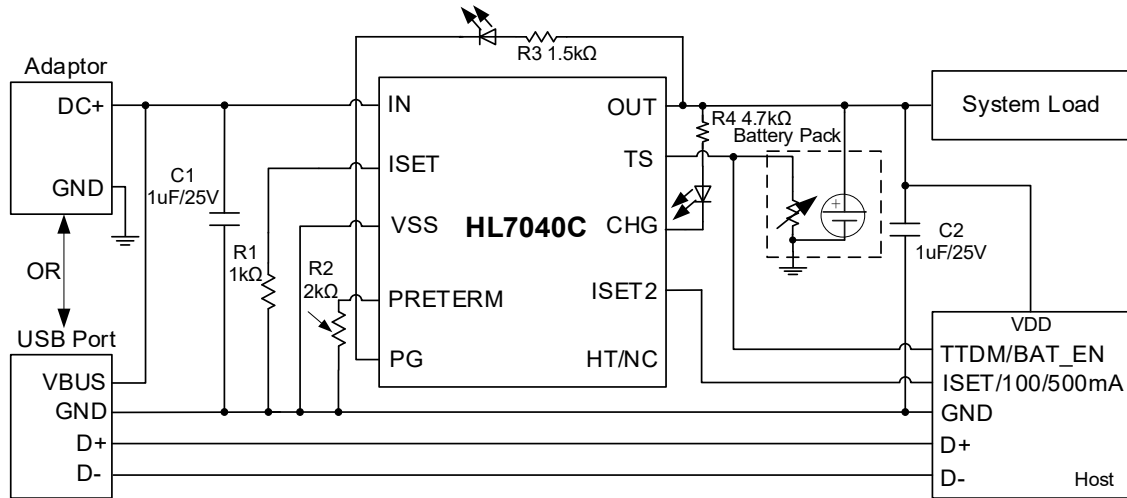


Figure 1. Typical Application Diagram

Order Information

Part Number	$V_{O(REG)}$	V_{OVP}	PreTerm	ASI/ASO	TS/BAT_EN	PG	CC Current (0-10°C)	Package
HL7040CFN01	4.20V	6.6V	Yes	No	TS (JEITA)	Yes	50%	2mm×2mm DFN-10
HL7040CFN03	4.35V	6.6V	Yes	No	TS (JEITA)			
HL7040CFN04	4.40V	6.6V	Yes	No	TS (JEITA)			



Important Notice

HMI reserves the rights to modify, update, improve, and discontinue its products, services, documentations and more without advance notice. We encourage customers to contact HMI's sales representative for the most up to date product information.

HMI's products, solutions, and documents must not be used for any medical or military purposes without a proper legal authorization from HMI. HMI disclaims any responsibilities and liabilities for personal or property damages arising from such applications.

All content, visuals, trademarks within this document, and any other intellectual property embedded in the product and document remains the sole property of HMI. Reproduction, alteration, distribution, or publication of any part or whole of this document is prohibited without legal consent from HMI.